

CLUB

Data Sheet

Floor



CLUB Floor L · black · shade melange grey

This family of timelessly classical lamps with shades has been improved to satisfy sophisticated demands. Slender aluminum profiles hold the seamless halves of the shade, avoiding unsightly shadow lines. Its friendly, atmospheric light can be regulated separately on the upper and lower section via push buttons on the side. And any superfluous cable is wound up in the base.

Examples of applications:

The ideal place for this iconographic floor lamp is next to a comfortable armchair.

Private spaces, waiting areas and hotels offer many possible uses for the multifunctional CLUB.

Technical data sheet

CLUB Floor has separate LED illuminants for the upper room light and the lower reading light. The lights can be controlled separately (on/off/dimming) via push buttons on the shade.

Design da Costa & Wolf

Material & surfaces




Shade

chintz white or melange grey
laminated on foil

Base and lamp tube

aluminum brushed or black coated

Dimensions in mm

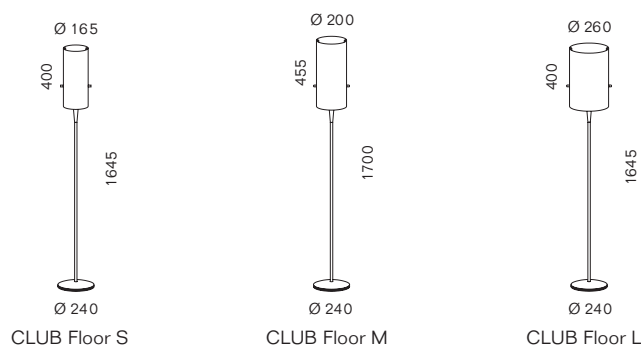

Technical data

Illuminant

3x CoB Bridgelux Vero 10 (BXRC 27H1000-D-72)

Energy efficiency class

This product contains three light sources of energy efficiency class F.

Power

20W CRI Ra>97 (R9>93)

(nominal value)

up 1 x 10W / down 2 x 5W

Light

Directly up- and downwards, directional, all around diffuse through shade

Color temperature

2700K

Luminous flux LED

1931 lm

(nominal value)

Operating voltage

primary 220-240V AC, secondary 26V DC

Control

integrated: up and down lights separately via push buttons (on/off/dimming)

Average lifetime LED

50.000 h*

Warranty

2 years

Weight

ca. 4,5 kg

Features

LED exchangeable. Cable wind-up in base.
Easily exchangeable shade. Material chintz white is flame retardant.





Marks

IP20 CE ⚡ F ⌚





* Information according to the manufacturers. serien Raumeuchten GmbH accepts no liability for the accuracy of the information.

Article numbers





CLUB Floor S

figure	description	lamp	control	power	CCT	art.-no.
	brushed, shade chintz white	LED	integr.	20 W	2700 K	CL2101
	black, shade chintz white	LED	integr.	20 W	2700 K	CL2102
	brushed, shade melange grey	LED	integr.	20 W	2700 K	CL2103
	black, shade melange grey	LED	integr.	20 W	2700 K	CL2104

CLUB Floor M

figure	description	lamp	control	power	CCT	art.-no.
	brushed, shade chintz white	LED	integr.	20 W	2700 K	CL2111
	black, shade chintz white	LED	integr.	20 W	2700 K	CL2112
	brushed, shade melange grey	LED	integr.	20 W	2700 K	CL2113
	black, shade melange grey	LED	integr.	20 W	2700 K	CL2114

CLUB Floor L

figure	description	lamp	control	power	CCT	art.-no.
	brushed, shade chintz white	LED	integr.	20 W	2700 K	CL2121
	black, shade chintz white	LED	integr.	20 W	2700 K	CL2122
	brushed, shade melange grey	LED	integr.	20 W	2700 K	CL2123
	black, shade melange grey	LED	integr.	20 W	2700 K	CL2124




Special versions

Other Versions (CCT/CRI) available on request.

Lighting data

All values are rated values. Power and luminous flux are subject to an initial tolerance of +/- 10%.
Tolerance of color temperature: +/-150 K. When not otherwise indicated the values apply for an ambient temperature of 25 °C.
The specified nominal and measured values refer to the illuminants used at the time the data sheet was prepared. Omissions excepted.

Caption

+ C	+C indicates products with pre-programmed CASAMBI module integrated in the luminaire. The CASAMBI functionality is basically applicable to all our products. For the different possibilities of integration (depending on the temperature) –in the luminaire, in the suspended ceiling, in the switch or the distribution box) we will be pleased to inform you. CASAMBI is a lighting control system which is operated via Bluetooth and can be integrated completely into the luminaire or behind the light switch. It is controlled via mobile devices using the free CASAMBI app, making its operation simple and intuitive. CASAMBI expands the possibilities of control with new options such as dimming, the programming of specific scenarios or groups, automations and many more. For further information, please visit www.casambi.com .
CCT	CCT (Correlated Color Temperature) is the colour temperature of an LED and is specified in Kelvin (K). We supply LED lights with a colour temperature of 2700 K at short notice. LED lights with a color temperature of 3000 K and higher usually have longer delivery times.
CRI	Colour Rendering Index
D2W	Luminaires with this characteristic have the Dim2Warm function which, when dimmed, reproduces the colour gradient with the warmer light colour of a classic filament lamp.
DALI 1-10 V	5-core mains cable required for control via DALI or 1–10 V. All LED luminaires operated with DALI power supply units are suitable for use in emergency lighting systems.
Lumen	The luminous flux (lumen) specifications are nominal values, i.e. pure module luminous flux values. The luminous flux indicates how much light radiates in all directions.
TW	Luminaires with this characteristic have variable colour temperature control from warm to cool white light.
UGR	Unified Glare Rating
IP	Protection class
LOR	The luminaire operating efficiency is given as a LOR value (Light Output Ratio) in percent.
	We are happy to make the Excel file with article numbers and current prices available to our trade partners. Please contact us at: serien@serien.com
	The crossed-out wheelee bin indicates that this electrical appliance must not be disposed of via household waste. In order to protect human health and the environment against potentially hazardous substances, at the end of its lifecycle this product can be taken to a collection point close to you and disposed of free of charge there. This separate disposal enables electrical appliances to be reused or recycled.
	At www.serien.com/downloads you will find helpful information and the latest technical data: Data sheets, catalogues, price lists, lighting data (EULUMDAT), 3D CAD data, declarations of conformity, returns form, FAQs, assembly instructions, drilling templates and other service instructions.

Credits

©Photography: Olaf Becker

Imprint

serien Raumluchten GmbH, HRB 22042 Amtsgericht Offenbach. Managing Directors: Jean-Marc da Costa, Manfred Wolf. All rights reserved.
No reproductions without prior written consent. All trademarks are registered. All products are protected by law. Infringements will be prosecuted to the fullest extent. Subject to alteration without notice.