

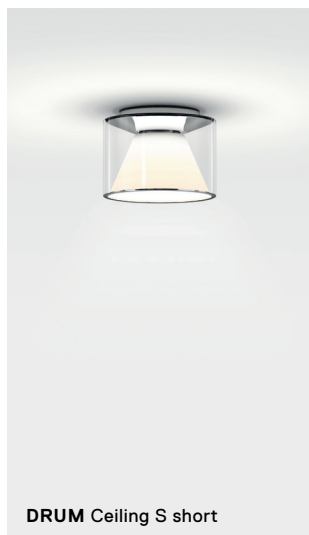
DRUM

Data Sheet

Ceiling



DRUM Ceiling S short



DRUM Ceiling S short



DRUM Ceiling S long



DRUM Ceiling M short



DRUM Ceiling M long

The DRUM luminaire family adds 4 cylindrical shapes to our product range. The respective combination gives rise to a geometric interplay of clear cylinders and cones with different angles on the inside. A transparent glass cylinder and matte internal reflector make for an appealing geometrical contrast and together become a luminaire with perfectly balanced light.

Examples of applications: With its graphic appearance, the luminaire fits perfectly into clean-cut architecture, the contract world, private spaces, and offices. With DRUM, the size and alignment of the inner body are always based on the height and diameter of the outer body. The geometrically adjusted volume of the opaline internal reflector allows various versions of the luminaire, which with their different lengths can relate to the height of the space.

Design Jean-Marc da Costa

DRUM

Ceiling

Material

Surfaces



glass S short

glass S long

glass M short

glass M long

Housing

Aluminum mirror polished

Shade

Mouth blown glass

Reflector

Polycarbonate opal

Variations





S short

S long

M short

M long

Dimensions in mm



Weight

1,3 kg

1,7 kg

2,0 kg

3,0 kg

LED

Light color

Color rendering Index CRI

Color consistency

Luminous flux

Energy efficiency class

2700 K

>97

2 Step

111 lm/W

E

3000 K

>97

2 Step

116 lm/W

E

S Dim2Warm

>95

3 Step

up to 97 lm/W

F

M Dim2Warm

>95

3 Step

up to 101 lm/W

F

Other versions (CCT/CRI) available on request.

LED light source replaceable by professionals

Average life 50,000 h (specification according to manufacturer).

Control gear

Control

Connected load

Operating voltage

Constant current / voltage

Feature

S TRIAC

11 W

230 V AC / 50 Hz

300 mA / 35 V

dimnable

S DALI

11 W

230 V AC / 50 Hz

300 mA / 35 V

dimnable

M TRIAC

20 W

230 V AC / 50 Hz

500 mA / 35 V

dimnable

M DALI

20 W

230 V AC / 50 Hz

500 mA / 35 V

dimnable, Touch DIM

Control gear replaceable by professionals

The luminaire may be operated at a maximum of the constant current specified above.


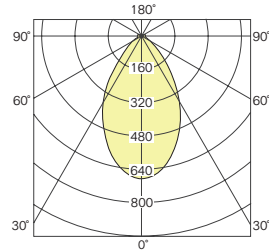


DRUM

Ceiling

Photometric data sheet

DRUM Ceiling S short





UGR ≤ 17

Power	CRI	CCT	Luminous flux (measured value)
20 W	Ra>97 R9>80	2700 K	1000 lm
		3000 K	1050 lm

Light: directed downwards,
diffuse all around

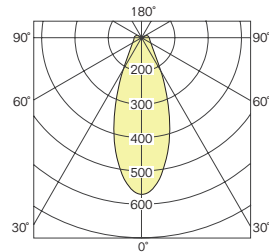DRUM Ceiling S long





UGR ≤ 14

Power	CRI	CCT	Luminous flux (measured value)
20 W	Ra>97 R9>80	2700 K	780 lm
		3000 K	820 lm

Light: directed downwards,
diffuse all around

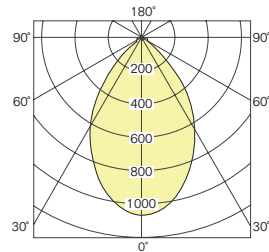DRUM Ceiling M short





UGR ≤ 17

Power	CRI	CCT	Luminous flux (measured value)
20 W	Ra>97 R9>80	2700 K	1710 lm
		3000 K	1800 lm

Light: directed downwards,
diffuse all around

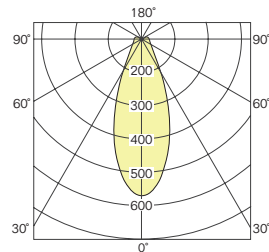DRUM Ceiling M long




UGR ≤ 16

Power	CRI	CCT	Luminous flux (measured value)
20 W	Ra>97 R9>80	2700 K	1320 lm
		3000 K	1380 lm

Light: directed downwards,
diffuse all around

⬇️ Note: The photometric data (EULUMDAT) can be downloaded from <https://serien.com/downloads/>


DRUM Ceiling S

figure	description	lamp	control	power	CCT	art.-no.
	lighting unit S	LED	TRIAC	11 W	2700K	LE015701
					3000K	LE015702
					1800–3000K D2W	LE015703
			DALI	11 W	2700K	LE015730
					3000K	LE015731
				1800–3000K D2W	LE015732	


<input type="radio"/>		glass S long with reflector				DU015801
-----------------------	---	-----------------------------	--	--	--	----------

<input type="radio"/>		glass S short with reflector				DU015802
-----------------------	---	------------------------------	--	--	--	----------

DRUM Ceiling M



figure	description	lamp	control	power	CCT	art.-no.
	lighting unit M	LED	TRIAC	20 W	2700K	LE015710
					3000K	LE015711
					1800–3000K D2W	LE015712
			DALI	20 W	2700K	LE015713
					3000K	LE015714
				1800–3000K D2W	LE015715	

<input type="radio"/>		glass M long with reflector				DU015803
-----------------------	---	-----------------------------	--	--	--	----------

<input type="radio"/>		glass M short with reflector				DU015804
-----------------------	---	------------------------------	--	--	--	----------

DRUM ist ein modularer Artikel. Bitte jeweils Leuchteneinheit und Glasschirm zusammen bestellen.

Information

+ C	+C indicates products with pre-programmed CASAMBI module integrated in the luminaire. The CASAMBI functionality is basically applicable to all our products. For the different possibilities of integration (depending on the temperature) – in the luminaire, in the suspended ceiling, in the switch or the distribution box) we will be pleased to inform you. CASAMBI is a lighting control system which is operated via Bluetooth and can be integrated completely into the luminaire or behind the light switch. It is controlled via mobile devices using the free CASAMBI app, making its operation simple and intuitive. CASAMBI expands the possibilities of control with new options such as dimming, the programming of specific scenarios or groups, automations and many more. For further information, please visit www.casambi.com .
CCT	CCT (Correlated Color Temperature) is the colour temperature of an LED and is specified in Kelvin (K). We supply LED lights with a colour temperature of 2700 K at short notice. LED lights with a color temperature of 3000 K and higher usually have longer delivery times.
CRI	Colour Rendering Index
D2W	Dim2Warm refers to a luminaire functionality that imitates the pleasant dimming behavior of classic incandescent lamps. When dimmed, the light not only becomes darker, but also changes its colour to warm white tone.
DALI 1-10 V	5-core mains cable required for control via DALI or 1–10 V. All LED luminaires operated with DALI power supply units are suitable for use in emergency lighting systems.
Lumen	The luminous flux (lumen) specifications are nominal values, i.e. pure module luminous flux values. The luminous flux indicates how much light radiates in all directions.
TW	Luminaires with this characteristic have variable colour temperature control from warm to cool white light.
UGR	Unified Glare Rating
IP	Protection class
LOR	The luminaire operating efficiency is given as a LOR value (Light Output Ratio) in percent.
	The crossed-out wheellie bin indicates that this electrical appliance must not be disposed of via household waste. In order to protect human health and the environment against potentially hazardous substances, at the end of its lifecycle this product can be taken to a collection point close to you and disposed of free of charge there. This separate disposal enables electrical appliances to be reused or recycled.
	At www.serien.com/downloads you will find helpful information and the latest technical data: Data sheets, catalogues, price lists, lighting data (EULUMDAT), 3D CAD data, EU Energy labels, declarations of conformity, returns form, FAQs, assembly instructions, drilling templates and other service instructions.
✓	This data sheet supersedes all previously published data sheet. The drawings shown in this document are for informational purposes only. Although great care has been taken when creating them, their proportions may not correctly reflect the proportions of the real product.
	All values are rated values. Power and luminous flux are subject to an initial tolerance of +/- 10%. Tolerance of color temperature: +/-150 K. When not otherwise indicated the values apply for an ambient temperature of 25 °C. The specified nominal and measured values refer to the illuminants used at the time the data sheet was prepared. Omissions excepted.

Imprint

serien Raumluchten GmbH, HRB 22042 Amtsgericht Offenbach. Managing Directors: Jean-Marc da Costa, Manfred Wolf. All rights reserved.
No reproductions without prior written consent. All trademarks are registered. All products are protected by law. Infringements will be prosecuted to the fullest extent. Subject to alteration without notice.